





- 1** Plug your gateway into a power outlet with the provided power cord and wait until the LED on the gateway turns red.

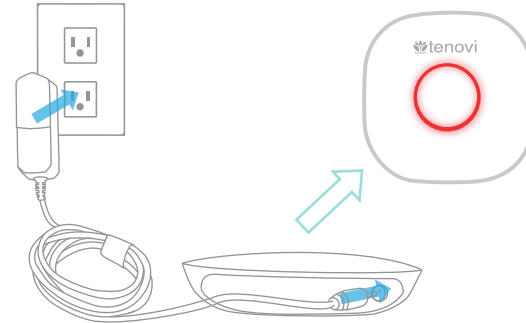

- 2** Open the lid from the back of your blood pressure monitor and pull the plastic tab. Connect the cuff into the port on the left back side of the monitor.

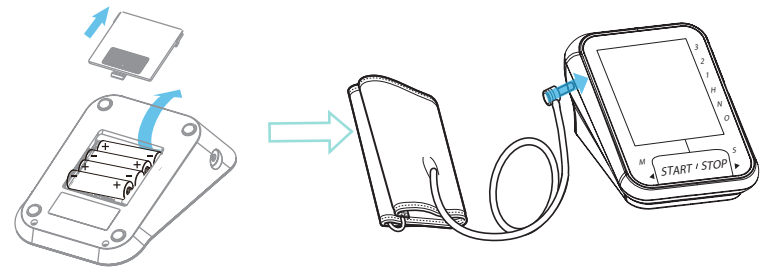




© 2021 Tenovi Co.

All rights reserved. Republication, duplication or modification in whole or in part is prohibited without prior written permission from Tenovi. All trademarks are owned by or licensed to


Tenovi, Co. unless otherwise noted.

Revision 05.01.2021


- 3** Tie the cuff on your upper arm and position the artery symbol  over the main artery on the inside of your arm. The artery symbol  should be 1 inch away from your elbow crease.

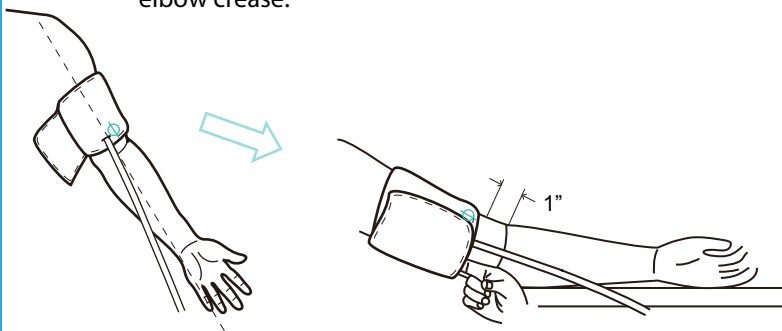

- 4** Sit comfortably with your tested arm resting on a flat surface at the same level as your heart. Turn your palm upwards and take 5-6 deep breaths.

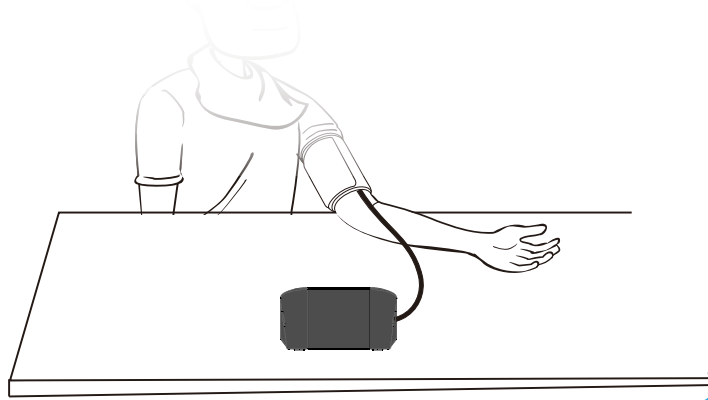

- 5** Press the "Start/Stop" button to take a measurement. Wait for the screen to turn off before removing the cuff. If the LED ring is **Green**, you have properly taken a measurement for the day and that measurement has been successfully transmitted.

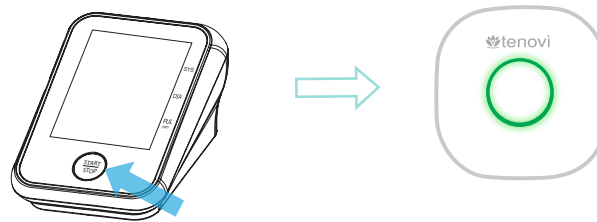

- 6** **Take one measurement once per day unless otherwise advised by your healthcare provider.** The LED on your Tenovi device will turn **Red** at the beginning of each day indicating you must take measurement for that day. The LED ring will turn **Green** when you successfully take a measurement and transmit it to your healthcare provider.



Measurement Needed



Measurement Successful